




Programming and Set up for the New LDP 9208D/9224D/F & 9240D.

The EHSA looks like below with the EHS on the bracket.




IMPORTANT: THE PHONE NEEDS TO BE TURNED OFF FROM POWER BEFORE PLUGGING THE EHS CABLE IN

Step 1 – plugging the flat cable (attached to the bracket EHS) this is a grey cable with a pink strip on it) into the dss port on the back of the phone with the pink strip facing upwards. (as the diagram below)

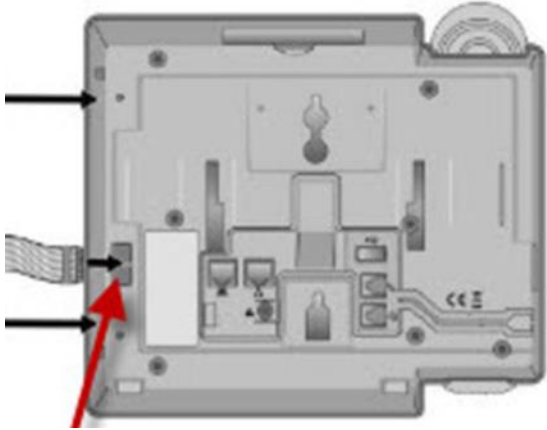

Step 2 – using the cable with the 2 pin connector ends rather than the square telephone plugs plug one end into the black box on the ehs and the other end into port 7 on the back of the Plantronics headset base as per below diagram.

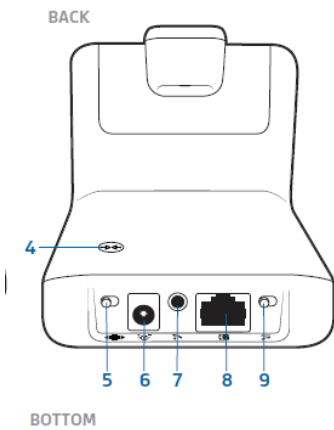

Step 3 – The cable that comes in the box with the headset – needs to be plugged into the back of the Plantronics headset base (port 8 on the above diagram) and then into

the headset port on the phone – this port should have a little picture of a headset



above it.

Step 4 – the phones receiver (the piece you would normally pick up to talk on, Stays plugged into the handset port on the phone.

It should look like this once all setup. (but pls note that EHS box of course will be on the bracket)



The phone programming that needs to be done on the phones as we had previously done and below

- 1. Press the Transfer (Trans) Key and then the numbers 19 and then select 1 for Ear Mic - Mic Headset ON – press Hold to save.**
- 2. Press the Transfer (Trans) Key and then the numbers 61 and select 1 - Speaker (do not do 0 for headset) - press Hold to save.**
- 3. . Press the Transfer (Trans) Key and then the numbers 62 and select 3 for Both - press Hold to save.**
This will allow the sound to come through phone and headset.